

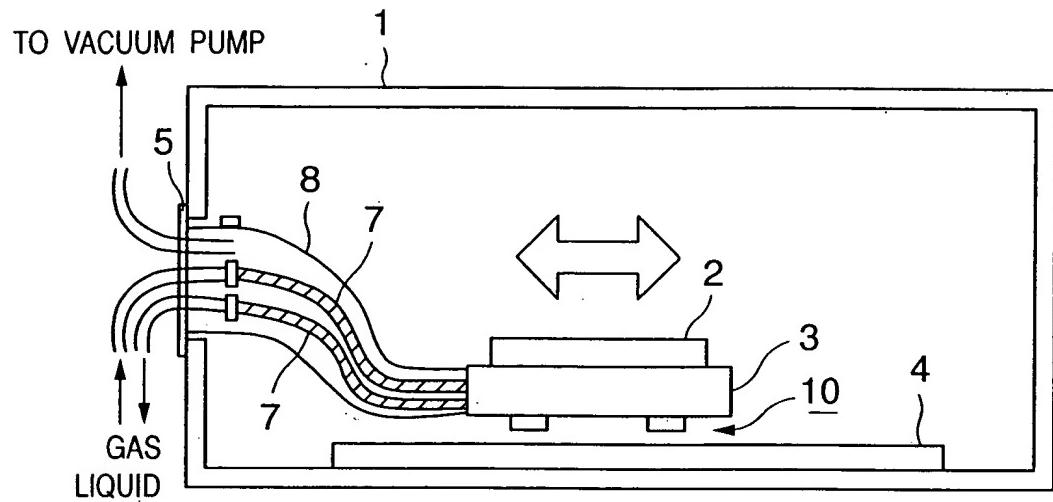
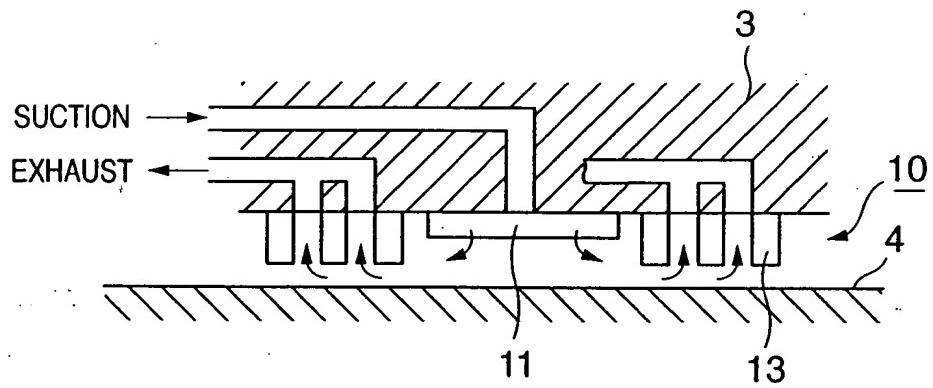
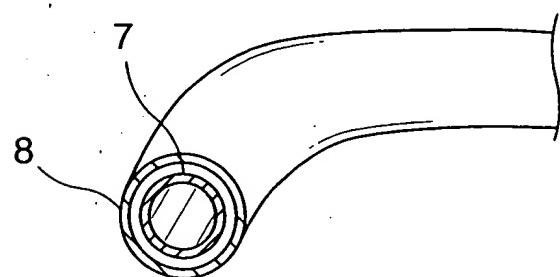
F I G. 1**F I G. 2****F I G. 3**

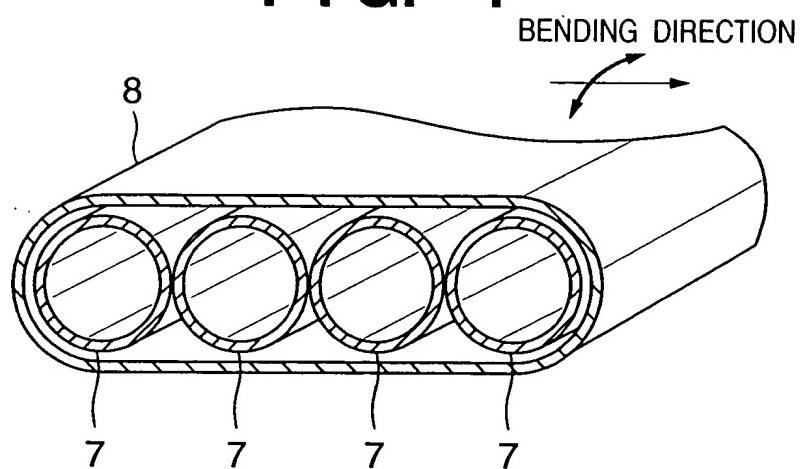
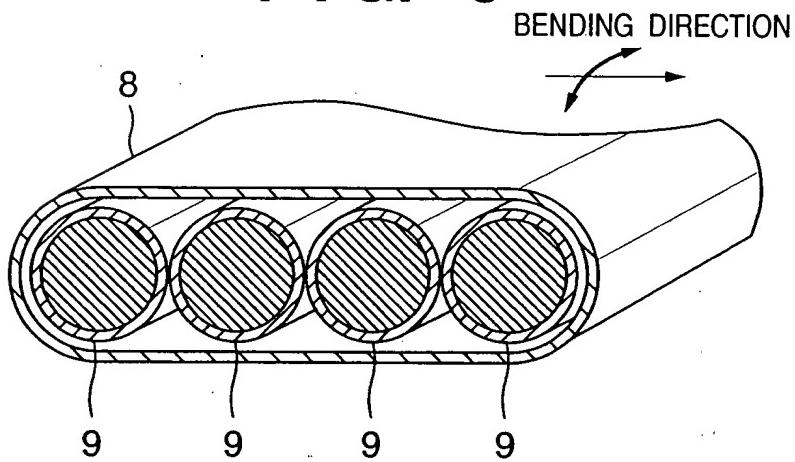
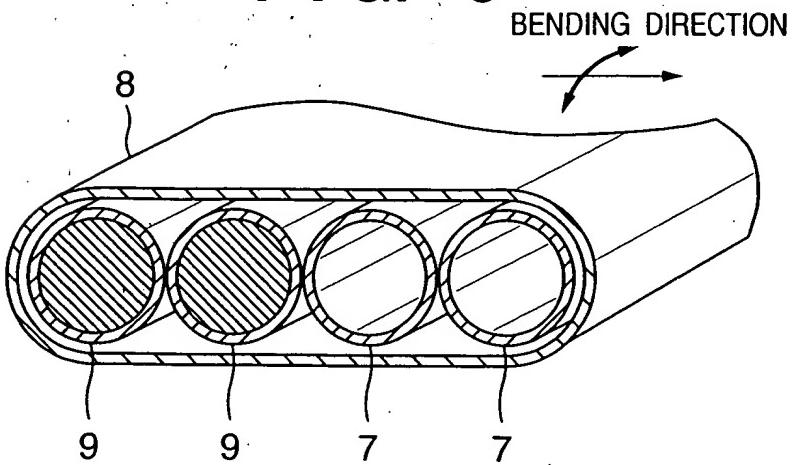
FIG. 4**FIG. 5****FIG. 6**

FIG. 7

The best documents & software for your engineering projects

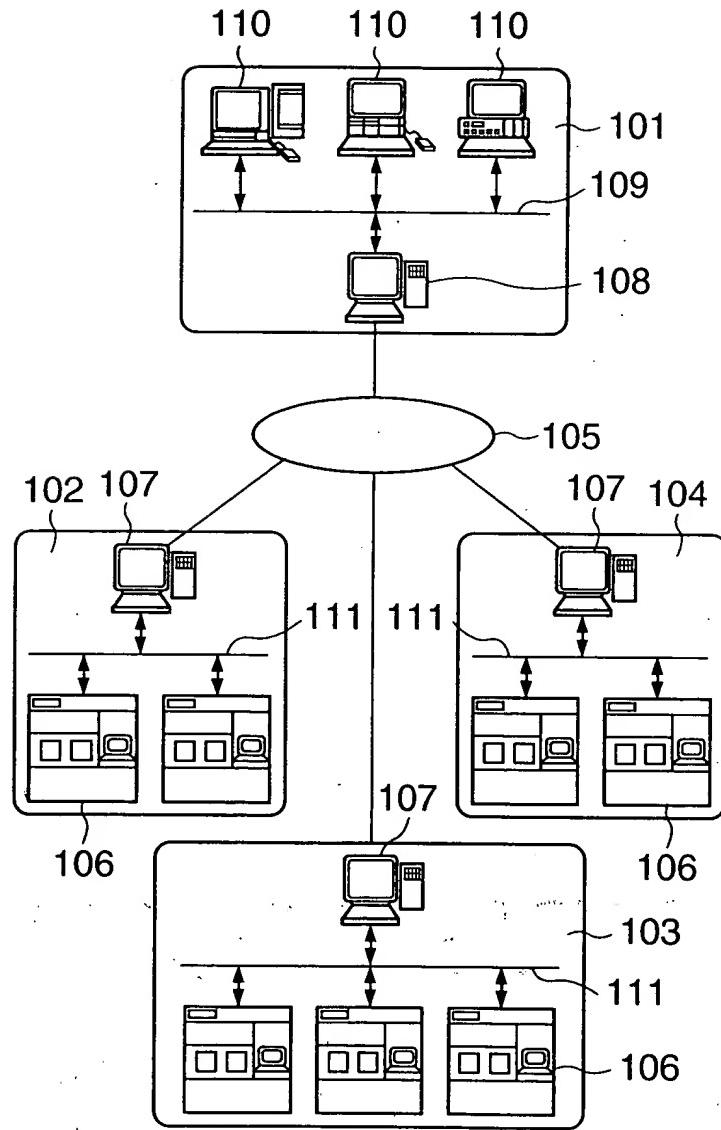


FIG. 8

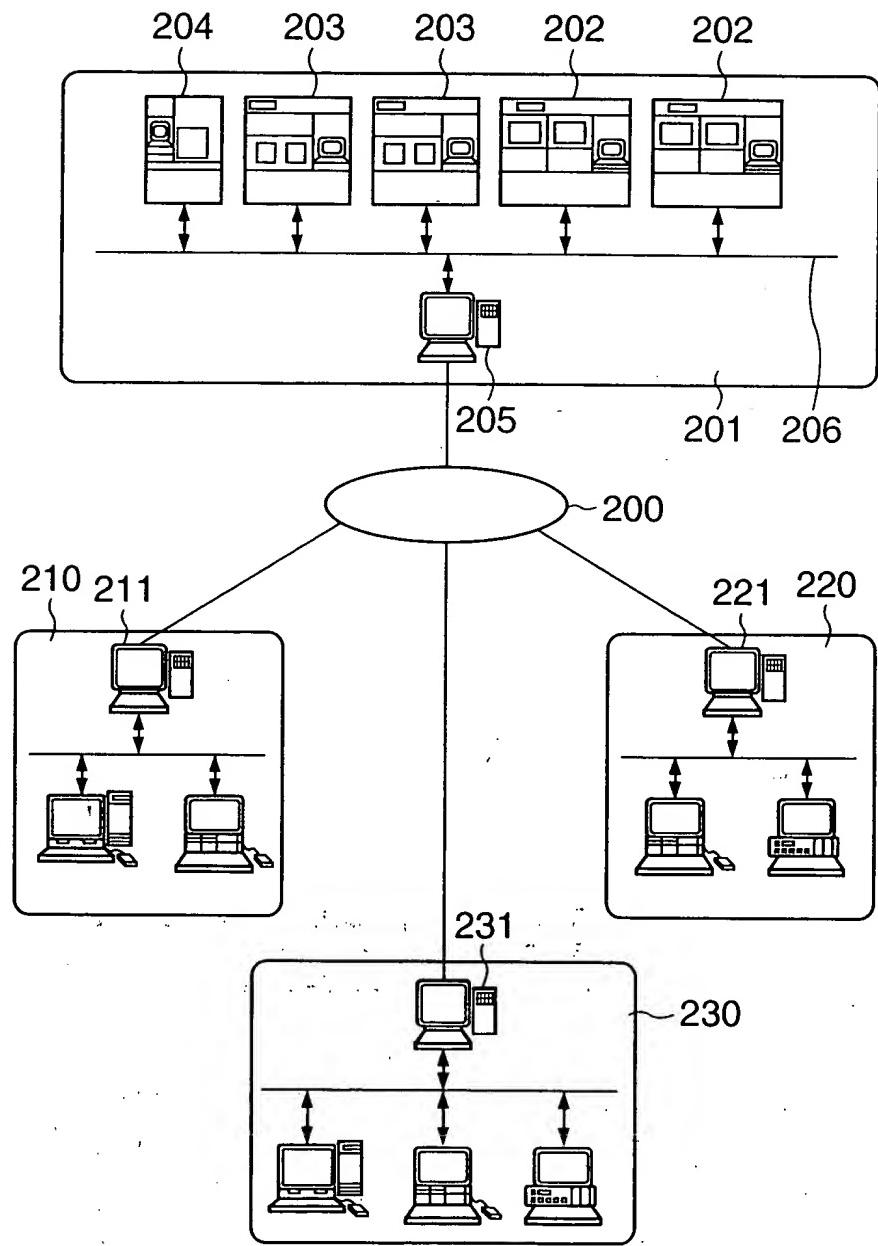


FIG. 9


URL <http://www.maintain.co.jp/db/input.html>

TROUBLE DB INPUT WINDOW

OCCURRENCE DATE	<input type="text" value="2000/3/15"/>	~ 404
TYPE OF APPARATUS	<input type="text" value="*****"/>	~ 401
SUBJECT	<input type="text" value="OPERATION ERROR (START-UP ERROR)"/>	~ 403
SERIAL NUMBER S/N	<input type="text" value="465NS4580001"/>	~ 402
DEGREE OF URGENCY	<input type="text" value="D"/>	~ 405
SYMPTOM	<input type="text" value="LED KEEPS FLICKERING
AFTER POWER-ON"/>	~ 406
REMEDY	<input type="text" value="POWER ON AGAIN
(PRESS RED BUTTON IN ACTIVATION)"/>	~ 407
PROGRESS	<input type="text" value="INTERIM HAS BEEN DONE"/>	~ 408
<input type="button" value="SEND"/> <input type="button" value="RESET"/>		410 411
LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATION GUIDE 412		

FIG. 10

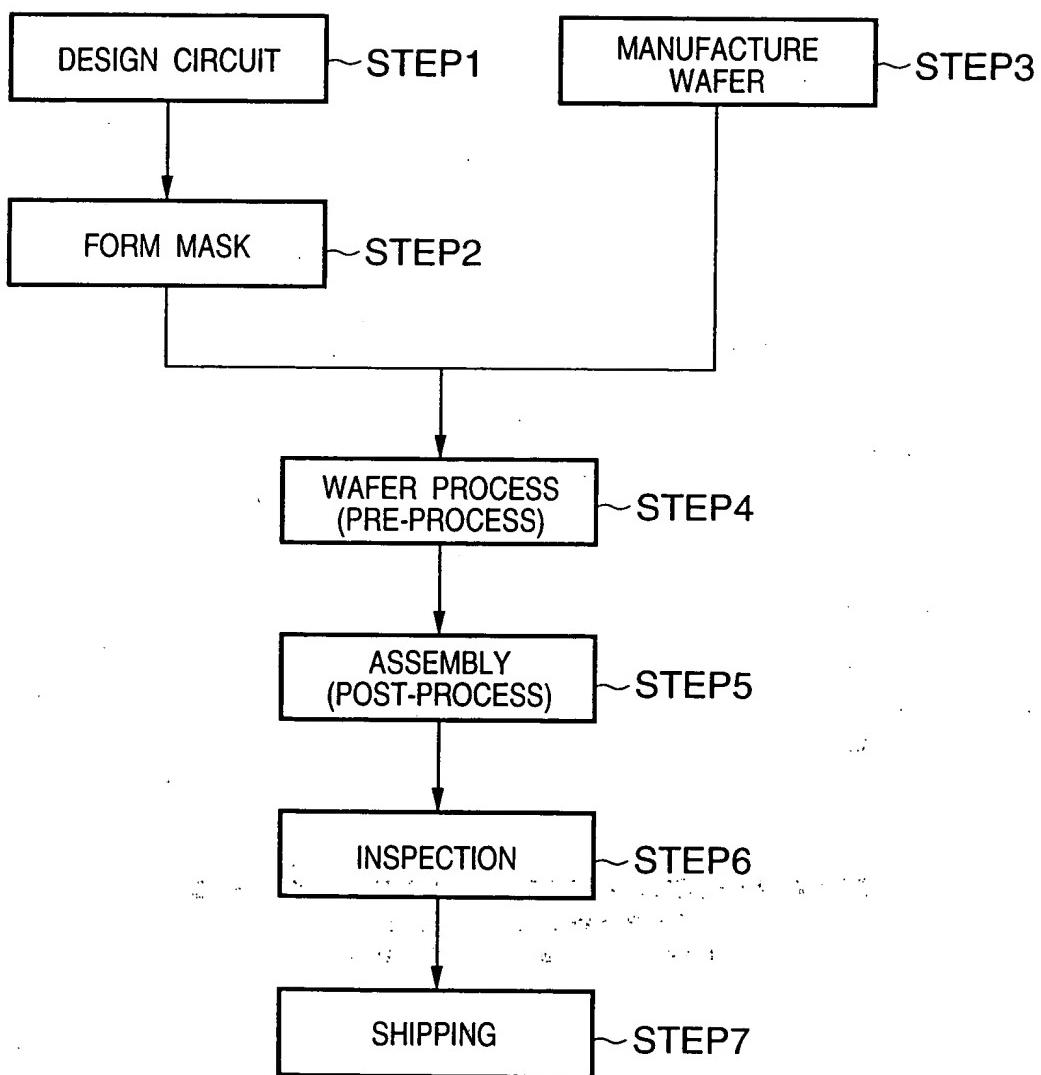SEMICONDUCTOR DEVICE MANUFACTURING FLOW



SEMICONDUCTOR DEVICE MANUFACTURING FLOW

FIG. 11

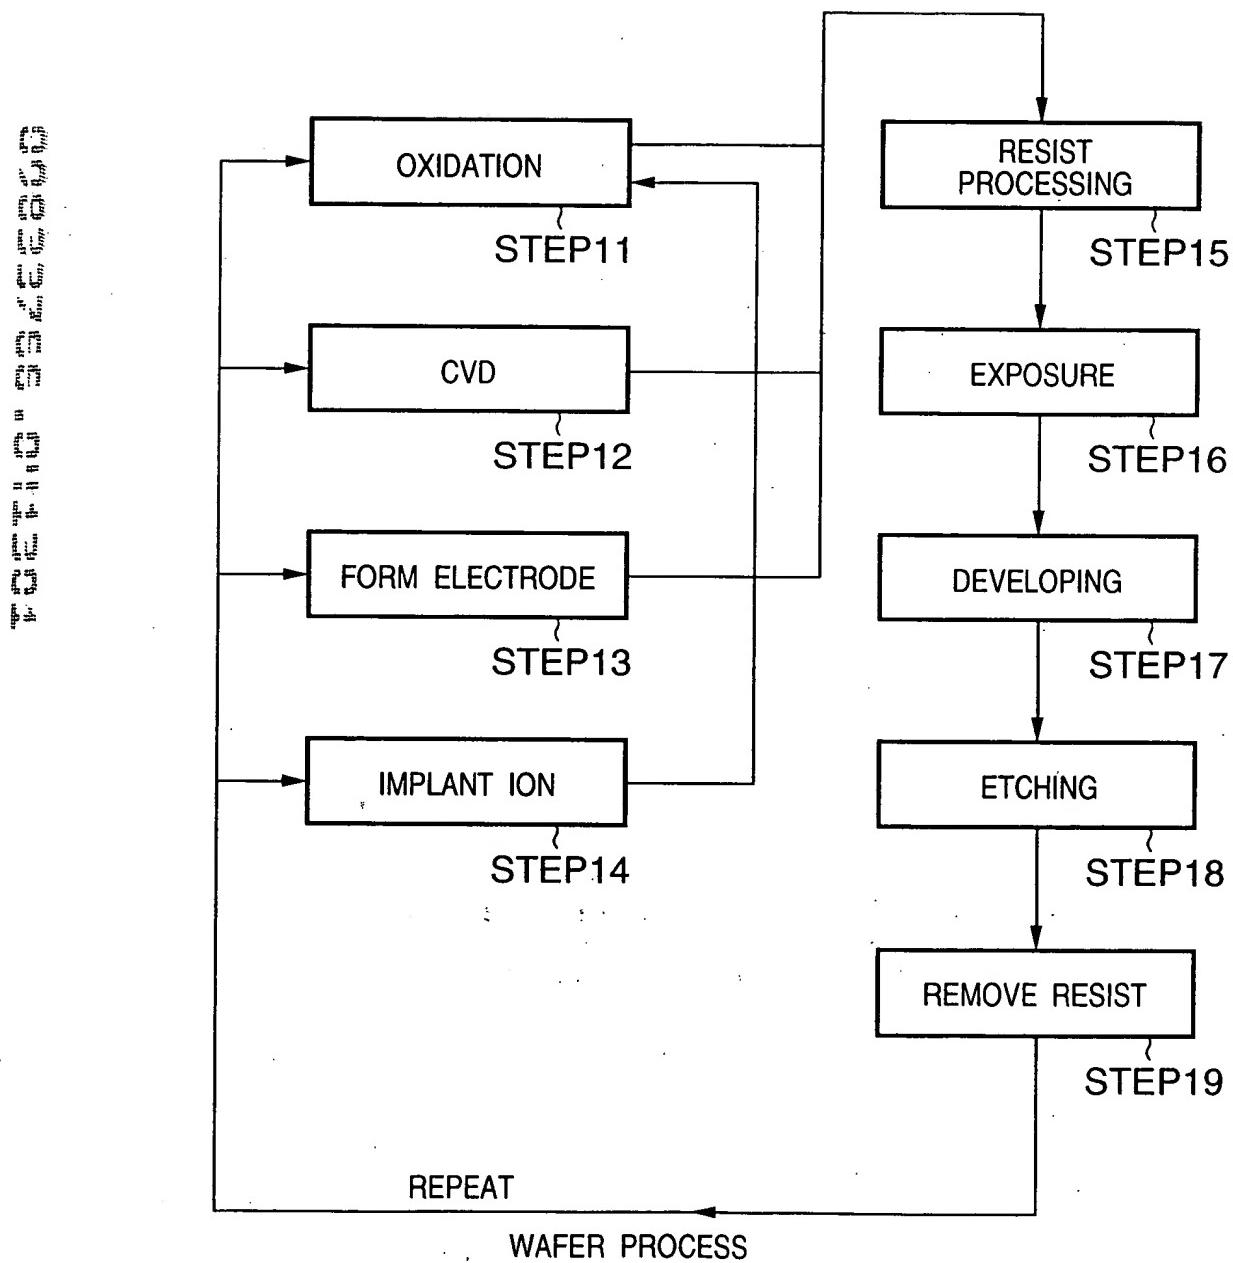


FIG. 12

